



INTERNATIONAL
Water Guard

IWG's Healthy Lav touchless products have been designed to be applicable to multiple platforms with ease of integration as a core principle. All the touchless components are powered by the IWG Lavatory Control Module (LCM) meaning that only one new power input into the lavatory is required. Also, if suitably located, existing panel cut-outs can be reused. This makes these products ideal for retrofit as well as line-fit applications.

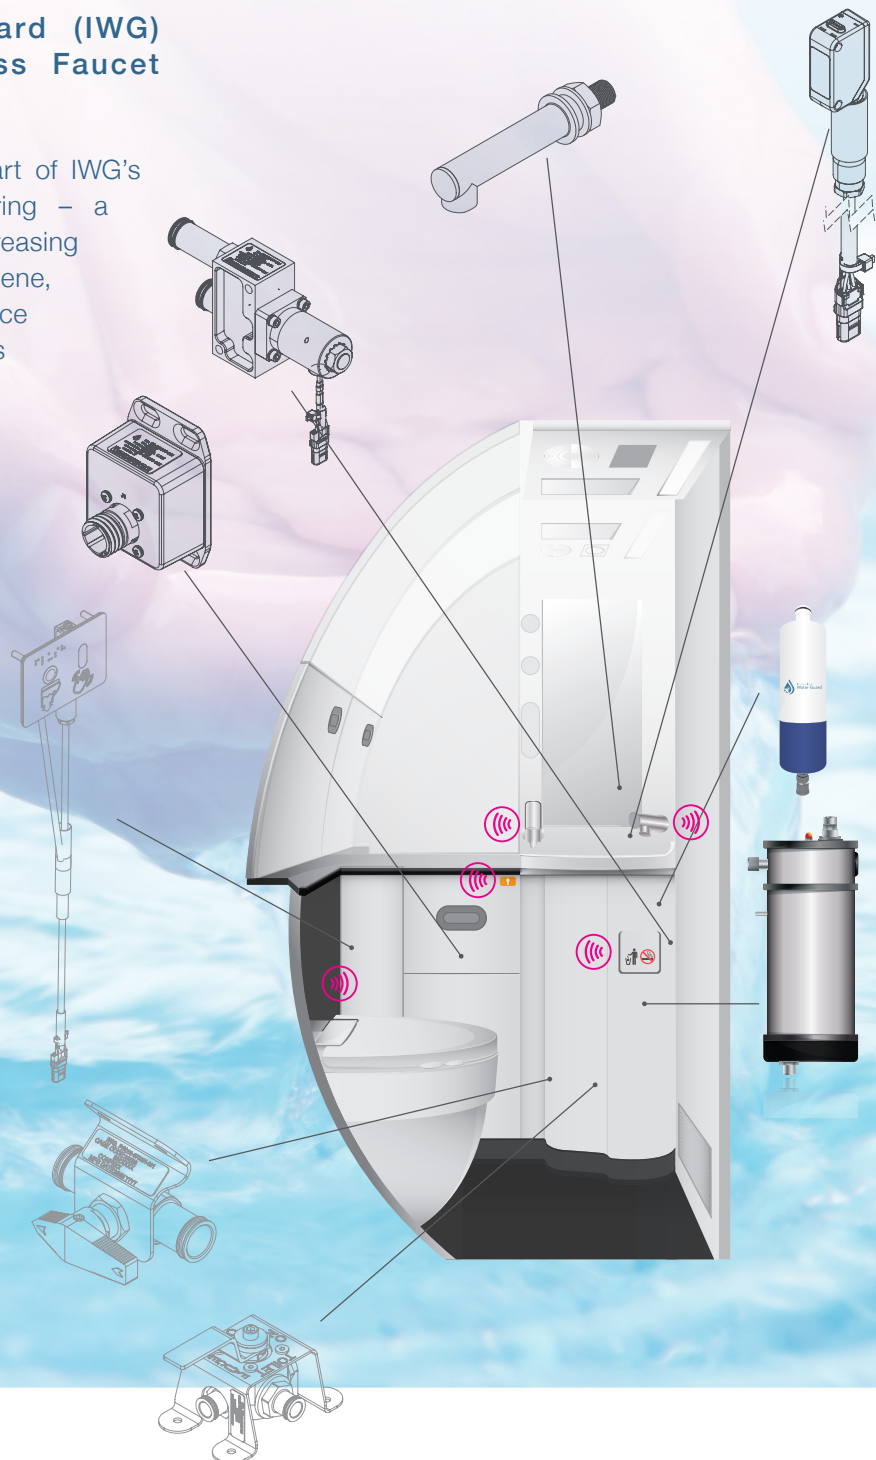



P/N: 09-390301-001

Integration: attaches structure using 4 fasteners

P/N: 09-630601-001

fasteners

Integration: attaches to structure using 2 fasteners

Qualified to **DO160G** Mechanical **4, 5, 6, 7, 8, 10, 11, & 26** | Electrical **15, 16, 17, 18, 19, 20, 21, 22, & 25**

OPTIONAL COMPONENTS:

P/N: 09-700102-001

P/N: 09-810101-001

Technical drawing of a 1/2 inch OD pipe with a 90-degree elbow and a threaded fitting. The drawing shows the pipe in a perspective view, with the elbow and fitting clearly defined. The text "1/2 inch OD)" is visible in the upper left corner of the drawing area.

P/N: 09-730101-001

[illegible]

Envelope: 50.8 x 132.1 x 170 mm
except electrical connector
(Approx. 300mm (12in))
(2.0 x 5.2 x 6.67 in)

Weight: 660g (1.5lbs)

Hydraulic: SAE AS33514-G-08

Electrical: D369-HP33-AS1
LCM power input

Integration: Attaches to structure using 4 fasteners

